

Wireless 1-phase/3-phase Current Meter

R718N1 series



R718N3 series



Power

2 x ER14505 battery

DC 3.3V

Cable Type

Detachable

Non-detachable

CT Specifications

75A / 150A / 250A / 630A / 1000A / 3000A


How to Choose the CT for Your Needs?

	Power		Cable	
	Battery	DC3.3V	Detachable	Non-detachable
R718Nxx	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
R718NxxE	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	
R718NxxD		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
R718NxxDE		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	


*Only for AC detection

A Perfect Match

Connect **R718N series** with **R603**. When sensor receives abnormal value, R603 sounds the alarm and changes the light color to notify users.

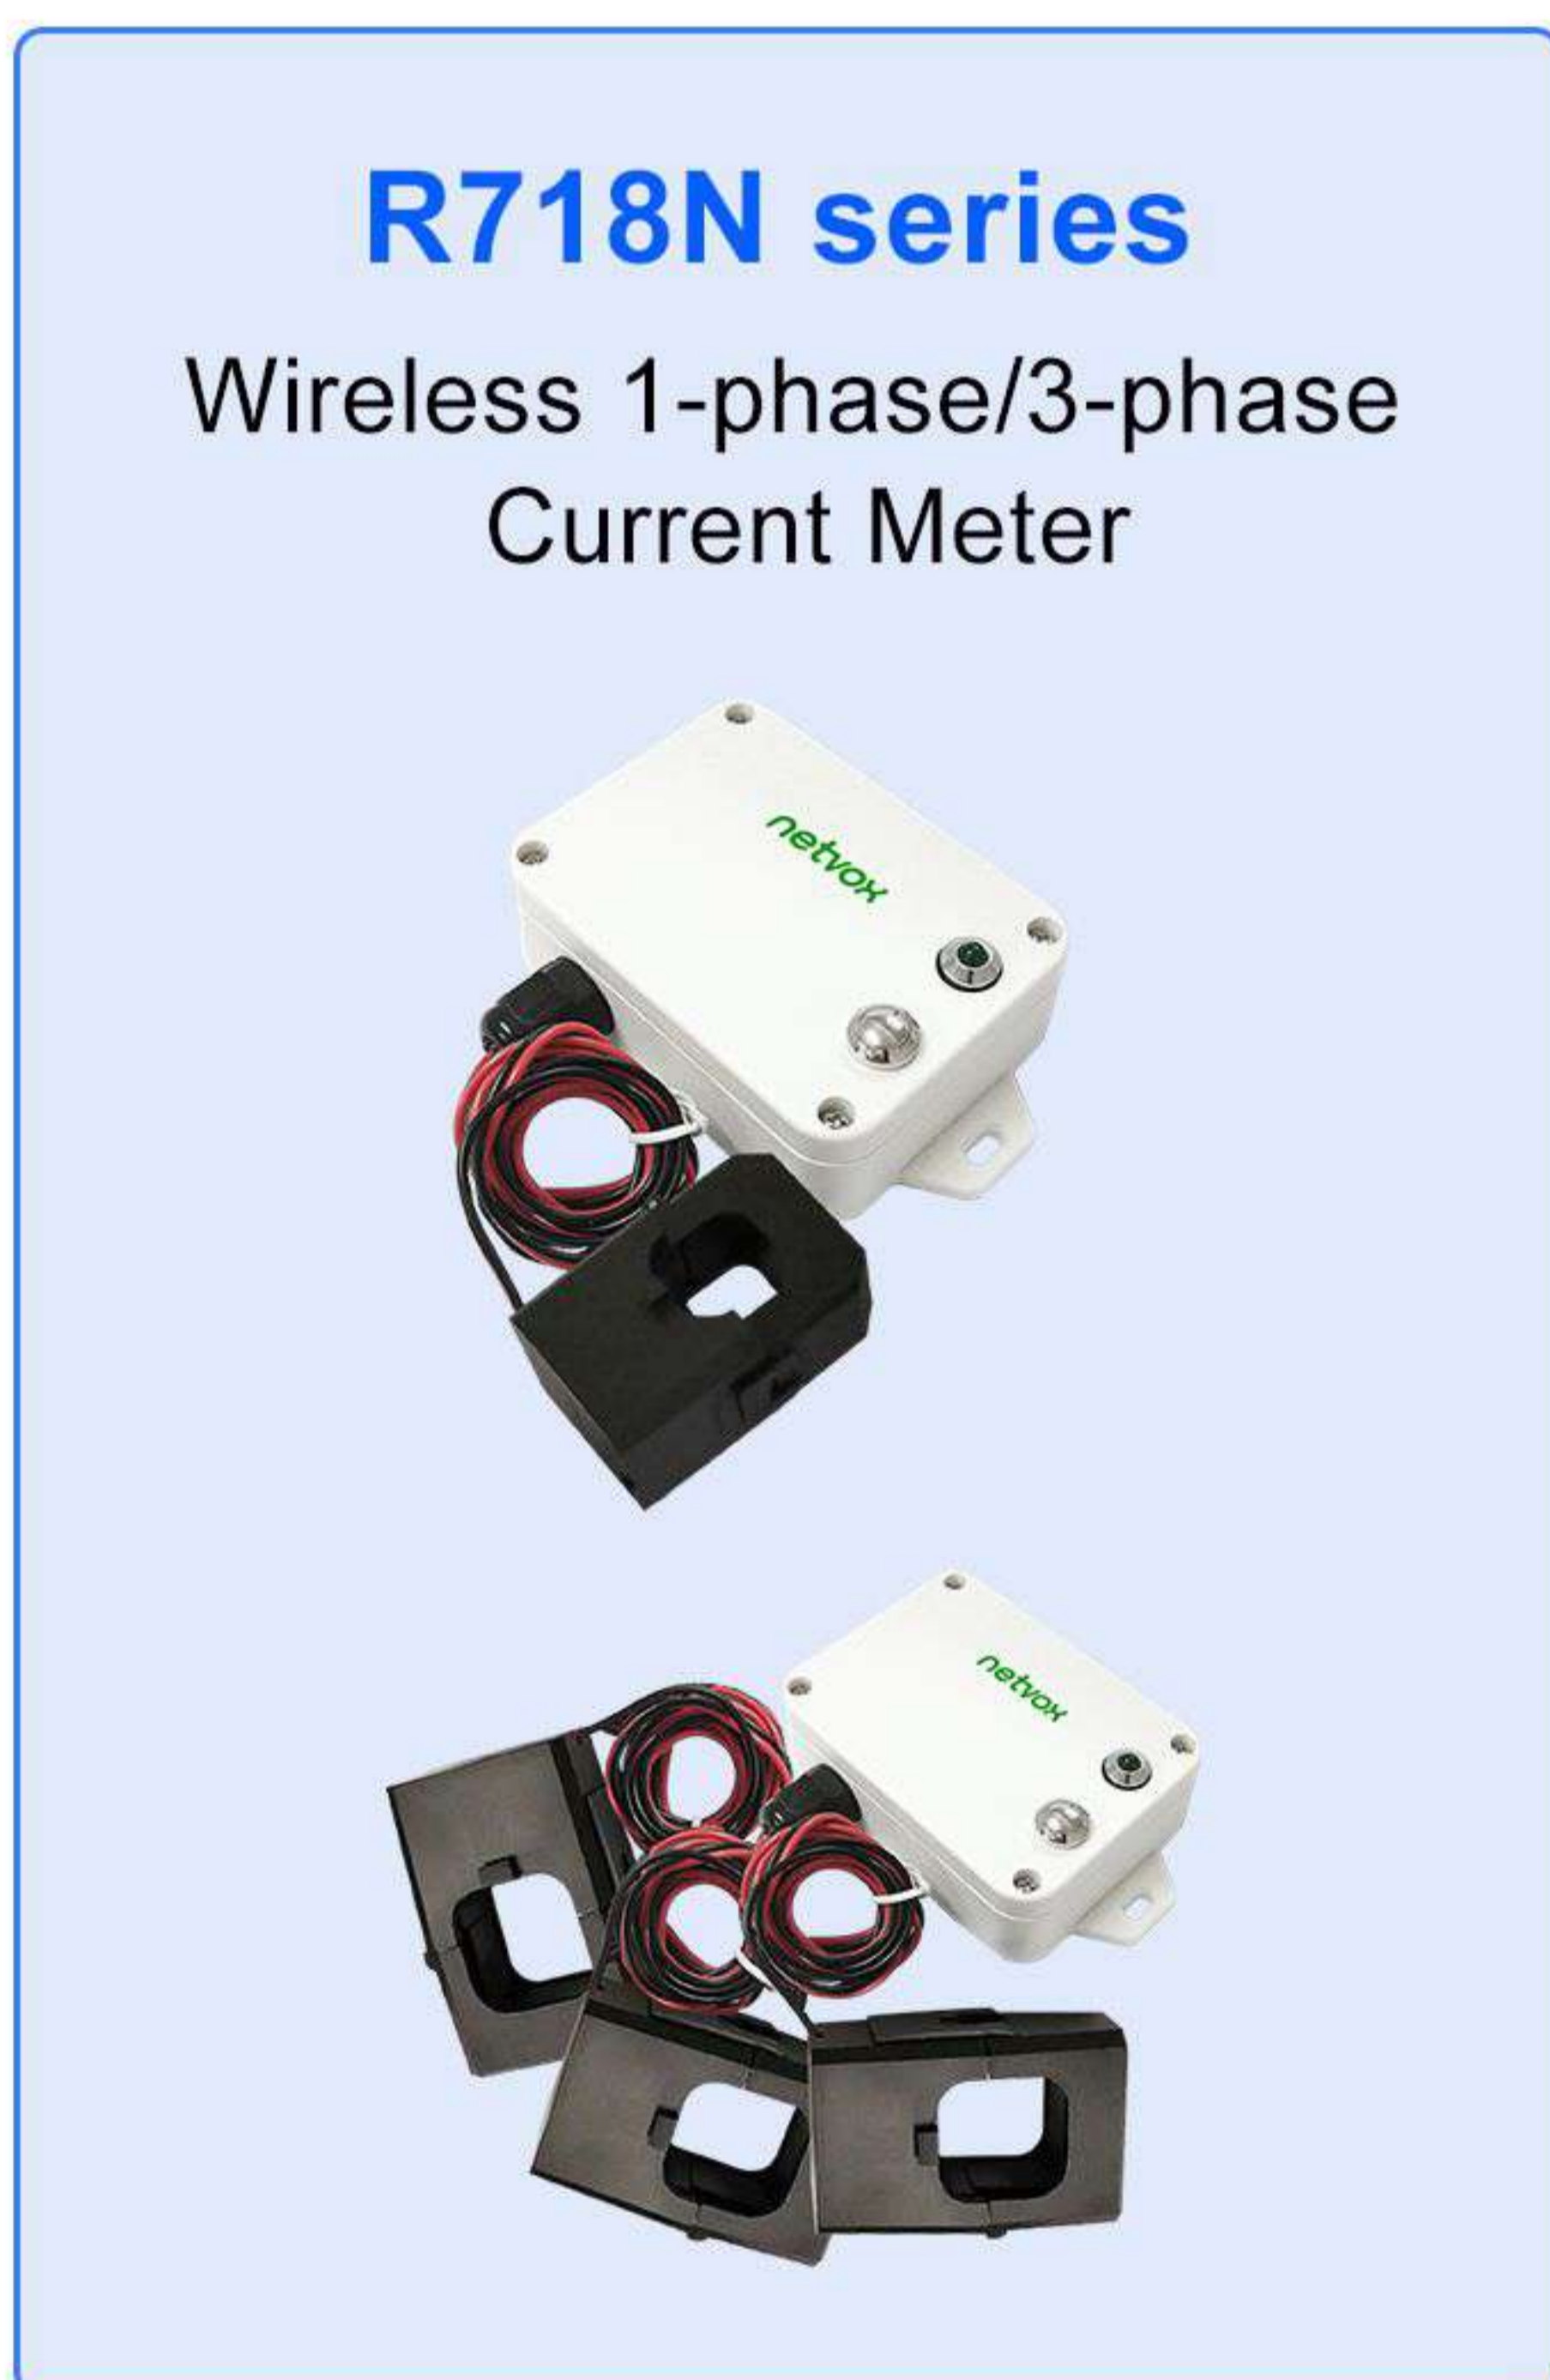

How Does it Work?

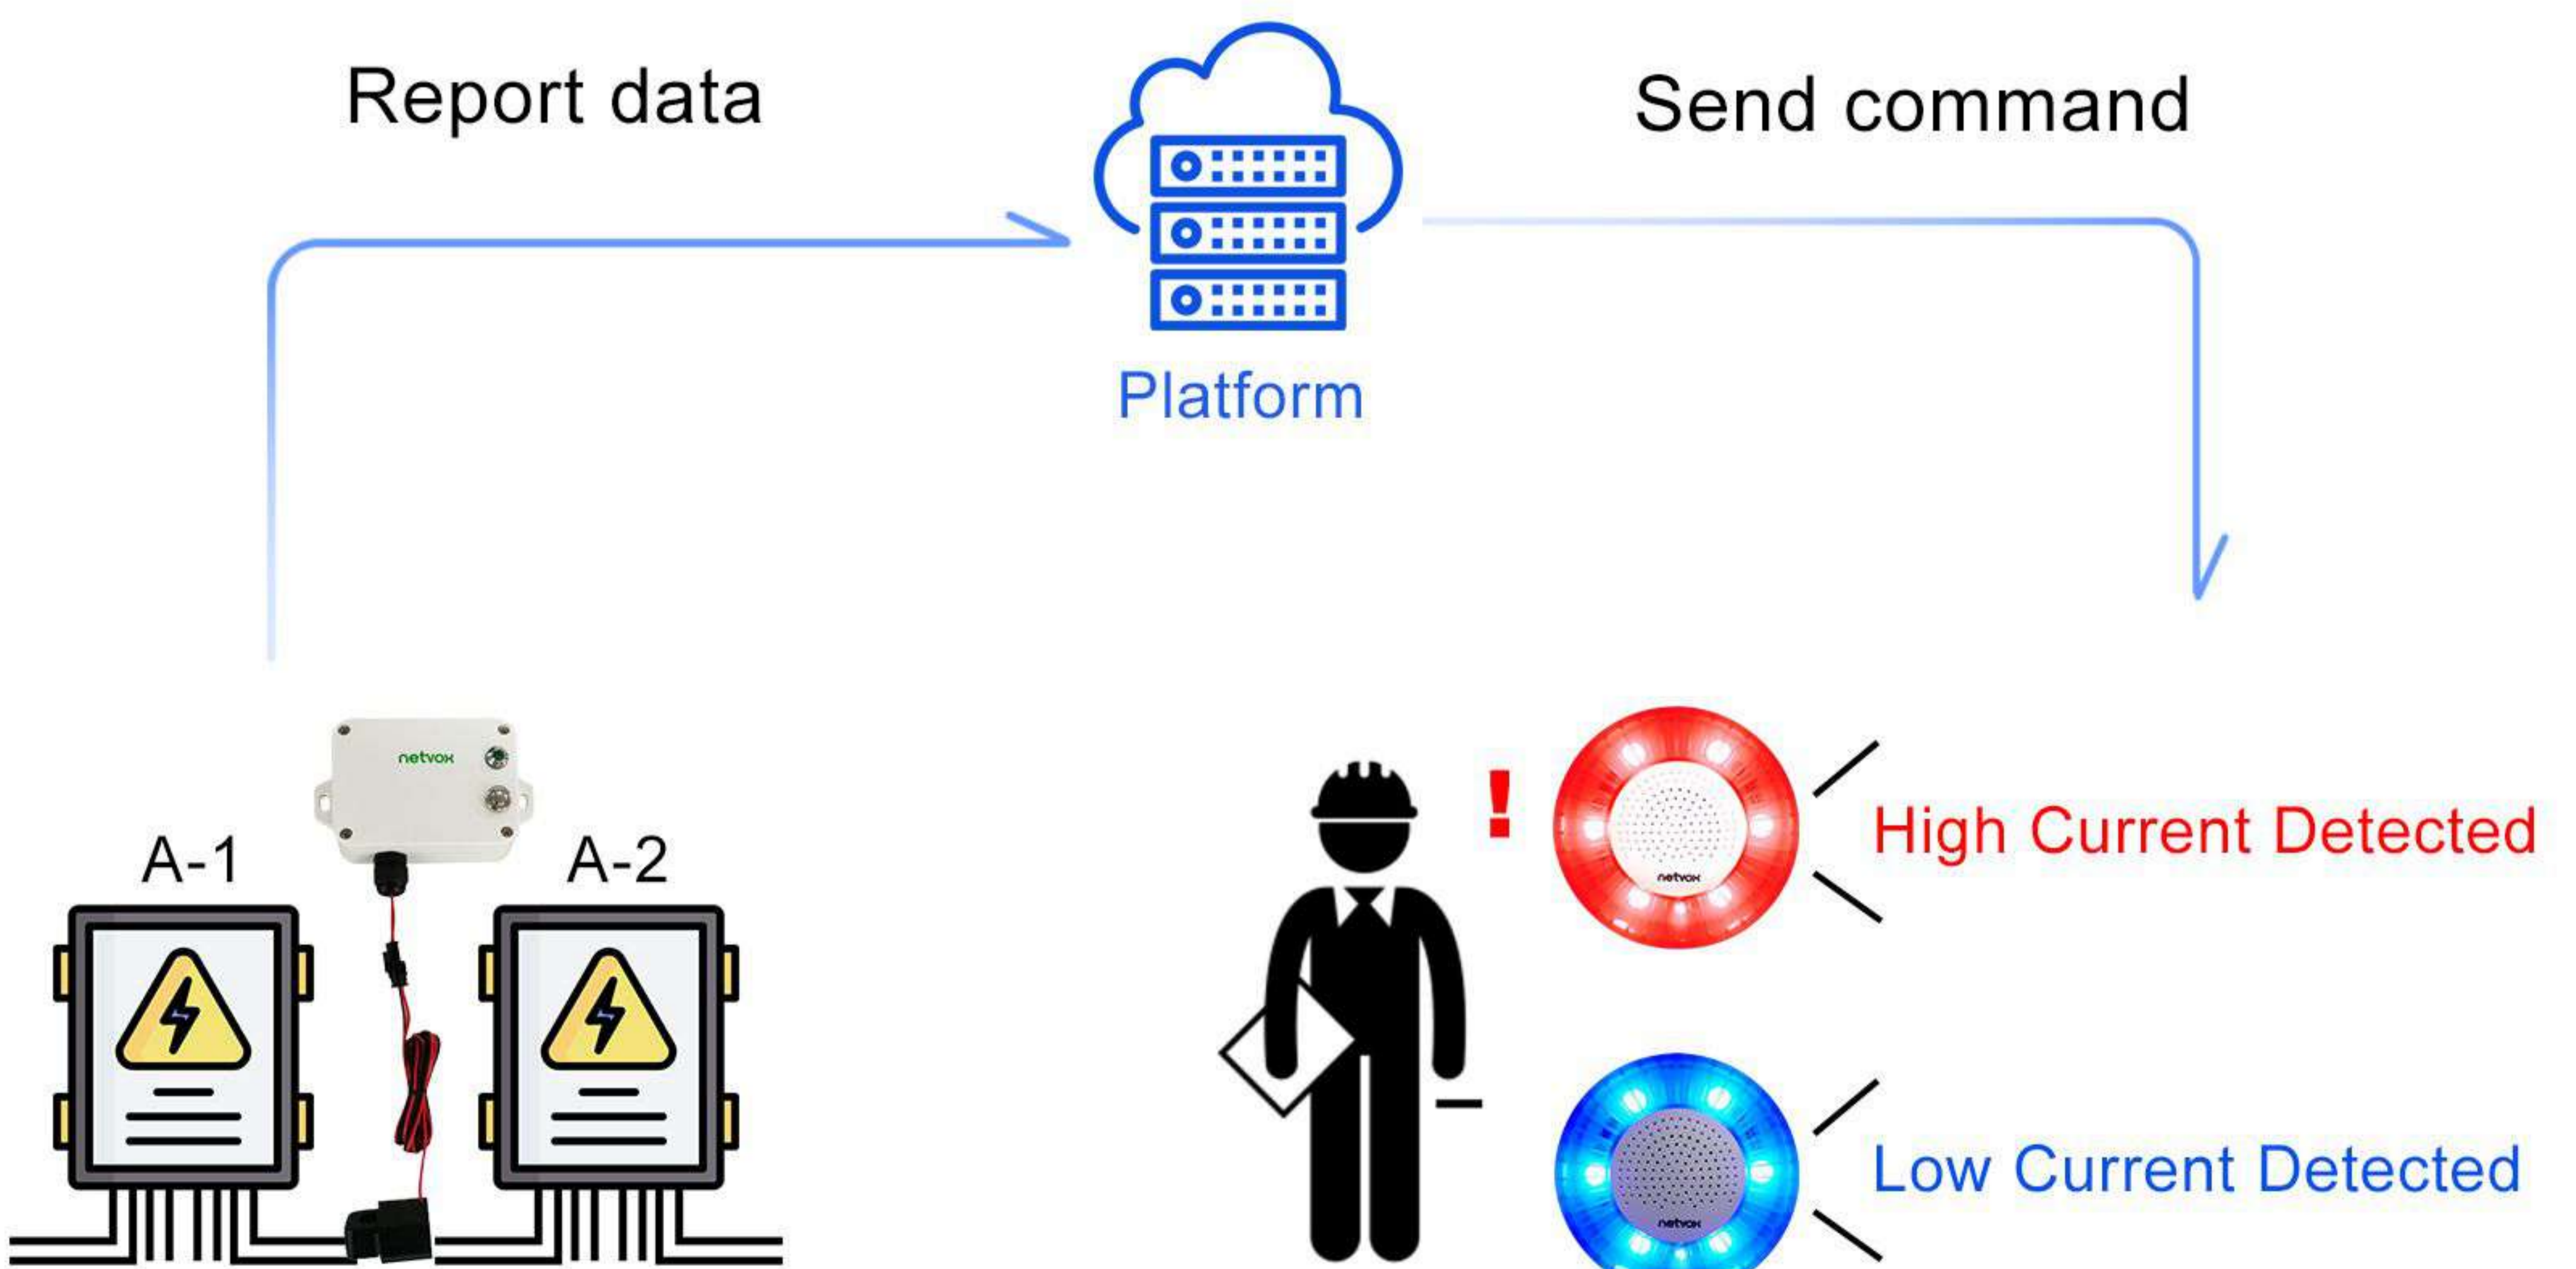

R718N37DE detects that the value exceeds the threshold!

R603 blinks and sound the alarm to alarm worker.

Made for Space

Worried about power equipment failures causing work stoppages? Staff can quickly detect and resolve issues.

